

# 1048



## 顶级音质设计，信号分配不可没有1048！

- 内置高质素开关电源电源供电，具有稳定和很高的信噪比；
  - 采用高级运放“OPA2604”音质扎实有力，Hi-END级别；
  - 采用ELNA®高级音频电容和高级铜脚金属膜电阻；
  - 全部采用“NEUTRIK®”品牌音频接插件；
  - 采用AI和SMT全机械加工，优化模块加工工艺；
  - 钣金机箱采用镀锌板，具有更好的接触接触性能；
- SMPS power supply, high stability and S/N.
  - Use high grade Hi-END IC “OPA2604”.
  - Use ELNA® high frequency capacitor and high class copper metal resistors.
  - Apply “NEUTRIK®” audio connectors.
  - Apply AI and SMT auto production, optimized module craftwork.
  - Zincification casing, better osculation performance.

**型号** 1048 1X8或2X4 信号分配器  
**Model** 1048 Signal distributor amplifier

信噪比 S/N rate (A weight) : > 100dB

频响 Frequency response : 20Hz-20kHz ±0.5dB

失真 THD% : < 0.03%

分配模式 Input mode : 2 x 4 (2 channel) or 1 x 8 (1 channel)

动态范围 Dynamic range : 118dB


备注：

1. 数据按：Q/SAE 1-2009标准测试得出。
2. SAE保留对以上参数的解释权，参数有所变动恕不另行通告，最后参数以产品说明书为准。

Remark：

1. Data is tested under Q/SAE 1-2009 standard.
2. SAE reserves the right to make changes in specification without prior notice. The final specification is subject to the user manual.

## 拓扑图 Topology diagram

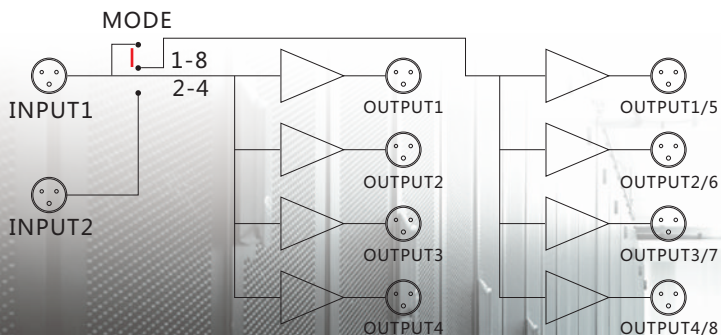

优良的加工工艺  
Optimized module craftwork



高音质ELNA电容  
High quality ELNA audio capacitor



高质素开关电源  
High quality SMPS



高级运放OPA2604  
High sound quality IC OPA2604



值得信赖的连接器件  
Reliable connector

